



## **AMBERLITE™ MB9L H/OH Ion Exchange Resin**

Mixture of Gaussian, Gel, Strong Acid Cation and Strong Base Anion Exchange Resins for Industrial Demineralization Applications

### **Description**

AMBERLITE™ MB9L H/OH Ion Exchange Resin is a volume-equilibrated mixture of strong acid cation and strong base anion exchange resins. It is fully regenerated, ready-to-use, non-regenerable, pre-mixed resin characterized by high cationic exchange capacity. The pre-mixed resin also allows for faster initial rinse-up prior to service, which minimizes rinse wastewater volume.

AMBERLITE MB9L H/OH is specifically designed for a partial demineralization of water when the ratio of alkalinity to free mineral acidity is higher than 1, and where the complete removal of cations and of the acidity is essentially required without the need to fully eliminate CO<sub>2</sub> and silica.

AMBERLITE MB9L H/OH is the reference mixed bed for electro-erosion applications. The resin mixture is prepared from high quality components and the proprietary manufacturing process ensures a homogeneous golden light color consistently from batch to batch. In operation, the resin provides a stable water quality and long operational lifetime in most metal cutting systems.

### **Applications**

- Electro-erosion applications, demineralization of water baths
- Mixed bed polishing for partial demineralization

### **System Designs**

- Non-regenerated mixed beds

### **Historical Reference**

AMBERLITE™ MB9L H/OH Ion Exchange Resin has previously been sold as AMBERLITE™ MB9L Ion Exchange Resin.

## Typical Physical and Chemical Properties\*\*

	Cation Resin	Anion Resin
<b>Physical Properties</b>		
Copolymer	Styrene-divinylbenzene	Styrene-divinylbenzene
Matrix	Gel	Gel
Type	Strong acid cation	Strong base anion, Type I
Functional Group	Sulfonic acid	Trimethylammonium
Physical Form	Golden light amber, translucent, spherical beads	Golden light amber, translucent, spherical beads
<b>Volume Ratio</b>	46 – 55%	54 – 45%
<b>Chemical Properties</b>		
Ionic Form as Shipped	H <sup>+</sup>	OH <sup>-</sup>
<b>Particle Size</b> §		
< 300 µm		≤ 5.0%
<b>Density</b>		
Shipping Weight		720 g/L

§ For additional particle size information, please refer to the [Particle Size Distribution Cross Reference Chart](#) (Form No. 177-01775).

## Product Performance

### Operating Capacity

The operating capacity of AMBERLITE™ MB9L H/OH Ion Exchange Resin can be estimated using the following formula, which gives an approximate determination of volume of water that can be treated:

$$BV = \frac{600}{TDS (meq/L)} \quad \text{or} \quad \frac{gal}{ft^3} = \frac{224000}{TDS (as ppm CaCO_3)}$$

where BV (Bed Volume) is the number of liters of a feedwater containing a TDS (Total Dissolved Solids) given in meq/L that can be demineralized with one liter of the resin mixture when run to exhaustion (or US gallons per cubic foot of the resin with TDS as ppm CaCO<sub>3</sub>).

### Treated Water Quality

AMBERLITE™ MB9L H/OH Ion Exchange Resin provides a high-quality demineralized water with a conductivity < 10 µS/cm and neutral pH that will satisfy the electrical discharge machining operations.

## Suggested Operating Conditions\*\*

Temperature Range (H <sup>+</sup> /OH <sup>-</sup> form) ‡	5 – 60°C (41 – 140°F)
--	-----------------------

‡ Operating mixed beds at elevated temperatures, for example above 60 – 70°C (140 – 158°F), may impact the purity of the loop and resin life. Contact our technical representative for details.


For additional information regarding recommended minimum bed depth and operating conditions for [mixed beds](#) (Form No. 177-03705) or [separate beds](#) (Form No. 177-03729) in water treatment, please refer to our Tech Facts.

## Hydraulic Characteristics

Estimated pressure drop for AMBERLITE™ MB9L H/OH Ion Exchange Resin as a function of service flowrate and temperature is shown in Figure 1. These pressure drop expectations are valid at the start of the service run with clean water and a well-classified bed.

**Figure 1: Pressure Drop**

Temperature = 10 – 60°C (50 – 140°F)

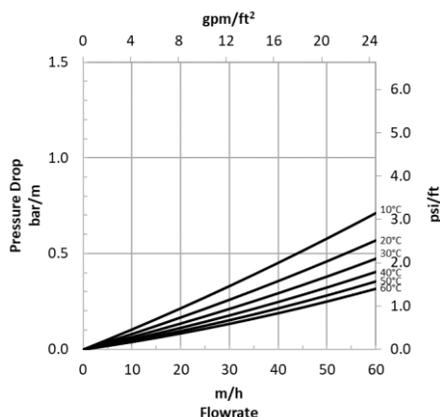

## Product Stewardship

Dow has a fundamental concern for all who make, distribute, and use its products, and for the environment in which we live. This concern is the basis for our product stewardship philosophy by which we assess the safety, health, and environmental information on our products and then take appropriate steps to protect employee and public health and our environment. The success of our product stewardship program rests with each and every individual involved with Dow products—from the initial concept and research, to manufacture, use, sale, disposal, and recycle of each product.

## Customer Notice

Dow strongly encourages its customers to review both their manufacturing processes and their applications of Dow products from the standpoint of human health and environmental quality to ensure that Dow products are not used in ways for which they are not intended or tested. Dow personnel are available to answer your questions and to provide reasonable technical support. Dow product literature, including safety data sheets, should be consulted prior to use of Dow products. Current safety data sheets are available from Dow.

### For more information, contact our Customer Information Group:

Asia Pacific	+86 21 3851 4988
Europe, Middle East, Africa	+31 115 672626
Latin America	+55 11 5184 8722
North America	1-800-447-4369

[www.dowwaterandprocess.com](http://www.dowwaterandprocess.com)

**WARNING:** Oxidizing agents such as nitric acid attack organic ion exchange resins under certain conditions. This could lead to anything from slight resin degradation to a violent exothermic reaction (explosion). Before using strong oxidizing agents, consult sources knowledgeable in handling such materials.

**NOTICE:** No freedom from infringement of any patent owned by Dow or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where Dow is represented. The claims made may not have been approved for use in all countries. Dow assumes no obligation or liability for the information in this document. References to "Dow" or the "Company" mean the Dow legal entity selling the products to Customer unless otherwise expressly noted. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

"All information set forth herein is for informational purposes only. This information is general information and may differ from that based on actual conditions. Please note that physical properties may vary depending on certain conditions and while operating conditions stated in this document are intended to lengthen product lifespan and/or improve product performance, it will ultimately depend on actual circumstances and is in no event a guarantee of achieving any specific results. Nothing in this document should be treated as a warranty by Dow.

