


9,000gpd(34.1m<sup>3</sup>/d)(TMG20-440C)

# Ultra low pressure BWRO T M G ( C )

Туре	Diameter Inch	Membrane Area ft²(m²)	Salt Reje	ection	Product Flow Rate gpd(m <sup>3</sup> / d)	Feed Spacer Thickness mil
TMG20-370C	8"	370(34)	99.5	5	9,500(36.0)	34
TMG20-400C	8"	400(37)	99.5	5	10,200(38.6)	31
TMG20N-400C	8"	400(37)	99.5	5	10,200(38.6)	34
TMG20-440C	8"	440(41)	99.5	5	11,300(42.6)	28
4. Manahana Tura				O 1 i	lead Fully Anamatic Dalyansi	da Campanita
1. Membrane Type				Cross Lin	ked Fully Aromatic Polyamic	de Composite
2. Test Conditions						
		Feed Water Pressure		110 ps	i(0.76MPa)	
		Feed Water Temperature		77° F(	25°C)	
		Feed Water Concentration		500 mg	g/l Nacl	
		Recovery Rate		15%		
		Feed Water pH		7		
3. Minimum Salt Rejection				99.0%		
4. Minimum Product Flow Rate				7,500gpd(28.4m³/d)(TMG20-370C) 8,200gpd(31.0m³/d)(TMG20-400C) 8,200gpd(31.0m³/d)(TMG20N-400C)		

## **Dimensions**

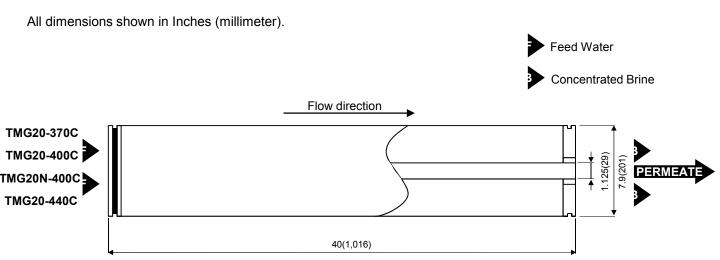

#### **Operating Limits**

Maximum Operating Pressure ————————————————————————————————————	365psi (2.5 MPa)
Maximum Feed Water Temperature ——————	———— 113° F (45°C)
Maximum Feed Water SDI15 ———————	5
Feed Water Chlorine Concentration —	——— Not Detactable
Feed Water pH Range, Continuous Operation	2-11
Feed Water pH Range, Chemical Cleaning	1-12
Maximum Pressure Drop per Element —	15 psi (0.10 MPa)
Maximum Pressure Drop per Vessel —————	50 psi (0.34 MPa)

### **Operating Information**

- 1.For the recommended design range, please consult the latest Toray technical bulletin, design guide lines, computer design program, and/ or call an application specialist. If the operating limits given in this Product Information Bulletin are not strictly followed, the Limited Warranty will be null and void.
- 2.All elements are wet tested, treated with a 1% by weight percent sodium bisulfite storage solution, and then vacuum packed in oxygen barrier bags, or treated with tested feed water solution, and then vacuum packed in oxygen barrier bags with deoxidant inside. To prevent biological growth during short term storage, shipment, or system shutdown, it is recommended that Toray elements be immersed in a protective solution containing 500 1,000 ppm of sodium bisulfite (food grade) dissolved in permeate.
- 3. The presence of free chlorine and other oxidizing agents under certain conditions, such as heavy metals which acts as oxidation catalyst in the feed water will cause unexpected oxidation of the membrane. It is strongly recommended to remove these oxidizing agents contained in feed water before operating RO system.
- 4. Permeate from the first hour of operation shall be discarded.
- 5. The customer is fully responsible for the effects of chemicals that are incompatible with the elements. Their use will void the element Limited Warranty.

#### **Notice**

- Toray accepts no responsibility for results obtained by the application of this information or the safety or suitability of Toray's products, either alone or in combination with other products. Users are advised to make their own tests to determine the safety and suitability of each product combination for their own purposes.
- 2. All data may change without prior notice, due to technical modifications or production changes.

Asia and Oceania: Toray Industries, Inc. RO Membrane Products Department

1-1, Nihonbashi muromachi 2-chome Chuo-ku, Tokyo 103-8666, Japan Tel: +81 3 3245 4540

Fax: +81 3 3245 4913 http://www.toraywater.com Americas: Toray Membrane USA, Inc. Sales Office

13435 Danielson St, Poway, CA 92064, USA Tel: +1 858 218 2390 Fax: +1 858 486 3063 Europe, Middle East and Africa: Toray Membrane Europe AG

Grabenackerstrasse 8 CH-4142 Münchenstein 1, Switzerland Tel: +41 61 415 87 10 Fax: +41 61 415 87 20 CHINA: Toray BlueStar Membrane Co., Ltd.

No.5 Anxiang Street, Area B, Beijing Tianzhu Airport Economic Development Zone, Beijing ,101318 P.R.C. Tel: +86 10 80490552 Fax: +86 10 80485217